

Binary Signal Alignment: Optimal Solution is Polynomial-time and Linear-time Solution is Quasi-optimal


Spyridon Peppas, Nicholas D. Sidiropoulos

University of Virginia

April 18, 2024, Seoul

Problem Statement

- Examining a fundamental scenario within the context of underlay CRN, involving a **strong** primary and a **weak** secondary user.



- PTx and STx are equipped with a single antenna.
- SRx is equipped with $M_s \geq 2$.

Motivation

- **Goal:** Reliably decode the low power underlay user in the presence of strong interference.
- **Prior art:**
 - **Traditional methods:** Need of accurate cross-channel estimates and $SINR \geq \tau$.
 - **Sophisticated methods:** Secondary decoding with simple repetition coding **w/o** requiring **CSI** at extremely **low SINR** [1].
- **This work:** Shows that the formulation in [1] can be solved **optimally** for binary vectors in **polynomial time**, where its two-step **linear-time** solution is **quasi-optimal**.

System Model

- The received signal at the SRx is:

$$\mathbf{Y}_s = \sqrt{\alpha_s} \mathbf{x}_s \mathbf{h}_s + \sqrt{\alpha_p} \mathbf{x}_p \mathbf{h}_{ps} + \mathbf{W}_s, \quad (1)$$

- $\mathbf{h}_{ps} \in \mathbb{C}^{1 \times M_s} \rightarrow$ channel responses between PTx and SRx.
- $\mathbf{h}_s \in \mathbb{C}^{1 \times M_s} \rightarrow$ channel responses between STx and SRx.
- $\mathbf{x}_s \in \mathbb{C}^{N \times 1}$ and $\mathbf{x}_p \in \mathbb{C}^{N \times 1}$ transmitted signals by STx and PTx
- $\mathbf{W}_s \in \mathbb{C}^{N \times M_s} \rightarrow$ AWGN with i.i.d. elements $\sim \mathcal{CN}(0, N_0)$.

Objective

Reliably decode secondary signal \mathbf{x}_s given the received signal \mathbf{Y}_s .

Secondary Transmission Protocol

- The ST_x **repeats** its information twice at very low power -much lower than PT_x-.

$$\mathbf{x}_s = [\mathbf{s}^\top, \mathbf{s}^\top]^\top, \mathbf{s} \in \mathbb{C}^{\frac{N}{2} \times 1}. \quad (2)$$

- The PT_x **does not** repeat, and its information can be partitioned as,

$$\mathbf{x}_p = [\mathbf{p}_1^\top, \mathbf{p}_2^\top]^\top, \mathbf{p}_1, \mathbf{p}_2 \in \mathbb{C}^{\frac{N}{2} \times 1}. \quad (3)$$

Objective

Decode the repeated \mathbf{s} at extremely **low SINR** given the received signal.

Signal Detection via CCA

- Split the signal at SRx to obtain the signal views $\mathbf{Y}_1, \mathbf{Y}_2$,

$$\mathbf{Y}_s = \begin{bmatrix} \mathbf{Y}_1 \\ \mathbf{Y}_2 \end{bmatrix}, \mathbf{Y}_r = \mathbf{s}\mathbf{h}_s + \mathbf{p}_r\mathbf{h}_{ps} + \mathbf{W}_r, \quad r \in \{1, 2\}$$

- MAX-VAR \rightarrow common component \mathbf{g} that the views share.

$$\begin{aligned} \min_{\mathbf{g}, \{\mathbf{q}_r\}_{r=1}^2} & \sum_{r=1}^2 \|\mathbf{Y}_r \mathbf{q}_r - \mathbf{g}\|_2^2 \\ \text{s.t.} & \quad \|\mathbf{g}\|_2^2 = 1. \end{aligned} \tag{4}$$

- $\{\mathbf{q}_r\}_{r=1}^2 \in \mathbb{C}^{M_s \times 1}$ are the dimensionality-reducing operators.
- In the noiseless case $\mathbf{g}^* = \lambda \mathbf{s}$, $\lambda \in \mathbb{C}$ [1].

Reformulation of CCA

- Reformulate MAX-VAR to the following **eigenvector problem**,

$$\begin{aligned} \max_{\mathbf{g}} \quad & \mathbf{g}^{\mathcal{H}} \underbrace{\left(\sum_{r=1}^2 \mathbf{Y}_r \mathbf{Y}_r^{\dagger} \right)}_{\mathbf{A} \in \mathbb{C}^{N/2 \times N/2}} \mathbf{g}, \\ \text{s.t.} \quad & \|\mathbf{g}\|_2^2 = 1, \end{aligned} \tag{5}$$

- After letting $\mathbf{Y}_r = \mathbf{U}_r \mathbf{\Sigma}_r \mathbf{V}_r^{\mathcal{H}}$, (5) reduces to the **principal component problem**

$$\begin{aligned} \max_{\mathbf{g}} \quad & \left\| \mathbf{g}^{\mathcal{H}} \underbrace{[\mathbf{U}_1, \mathbf{U}_2]}_{\mathbf{M} \in \mathbb{C}^{N/2 \times 2M_s}} \right\|_2^2 \\ \text{s.t.} \quad & \|\mathbf{g}\|_2^2 = 1. \end{aligned} \tag{6}$$

- Overall complexity is bounded by $\mathcal{O}(NM_b^2)$ via truncated SVD.

Reformulation of CCA - Binary Case

- If $\mathbf{s} \in \{\pm 1\}^{N/2}$ and the receiver demodulates both (I/Q) components, then the **eigenvector problem** can be written as

$$\begin{aligned} \max_{\mathbf{g}} \quad & \mathbf{g}^\top \Re\{\mathbf{A}\} \mathbf{g}, \\ \text{s.t.} \quad & \|\mathbf{g}\|_2^2 = 1. \end{aligned} \tag{7}$$

- Then the equivalent **principal component problem** can be solved again with $\mathcal{O}(NM_b^2)$,

$$\begin{aligned} \max_{\mathbf{g}} \quad & \left\| \mathbf{g}^\mathcal{H} \underbrace{[\Re\{\mathbf{U}_1\}, \Re\{\mathbf{U}_2\}, \Im\{\mathbf{U}_1\}, \Im\{\mathbf{U}_2\}]}_{\mathbf{M} \in \mathbb{R}^{N/2 \times 4M_s}} \right\|_2^2 \\ \text{s.t.} \quad & \|\mathbf{g}\|_2^2 = 1. \end{aligned} \tag{8}$$

Optimal Solution - BPSK

- if $\mathbf{s} \in \{\pm 1\}^{N/2}$ we can pose the **eigenvector problem** as

$$\max_{\mathbf{g} | \mathbf{g} \in \{\pm 1\}^{N/2}} \mathbf{g}^T \Re\{\mathbf{A}\} \mathbf{g}, \quad (9)$$

- \mathbf{A} is Hermitian $\rightarrow \Re(\mathbf{A})$ symmetric PSD.
- In the noiseless case $\text{rank}(\mathbf{A}) = 3 \rightarrow \text{rank}(\Re(\mathbf{A})) \leq 5$.
- In the presence of noise \nearrow , ... truncation to effective rank through spectral factorization.
- In general, the complexity to solve (9) grows **exponentially**, ... but $\Re(\mathbf{A})$ is rank deficient of rank $D \Rightarrow \mathcal{O}(N^D)$ [2].

Optimal Solution - 4QAM

- if \mathbf{s} contains 4QAM symbols, the **eigenvector problem** can be reformulated as,

$$\max_{\mathbf{b}|\mathbf{b}\in\{\pm 1\}^N} \mathbf{b}^\top \mathbf{H} \mathbf{b}, \quad (10)$$

$$\begin{aligned} \mathbf{b} &:= \left[\Re \{ \mathbf{g} \}^\top, \Im \{ \mathbf{g} \}^\top \right]^\top, & \mathbf{b} &\in \mathbb{R}^{N \times 1}, \\ \mathbf{H} &:= \begin{bmatrix} \Re \{ \mathbf{A} \} & -\Im \{ \mathbf{A} \} \\ \Im \{ \mathbf{A} \} & \Re \{ \mathbf{A} \} \end{bmatrix}, & \mathbf{H} &\in \mathbb{R}^{N \times N}. \end{aligned} \quad (11)$$

- \mathbf{H} is symmetric PSD with $\text{rank}(\mathbf{H}) = 6$ in the noiseless case.
- Noisy regime \rightarrow truncate to rank 6.
- Problem (10) again can be solved with $\mathcal{O}(N^D)$, because \mathbf{H} is rank deficient of rank D [2].

Numerical Results - BPSK

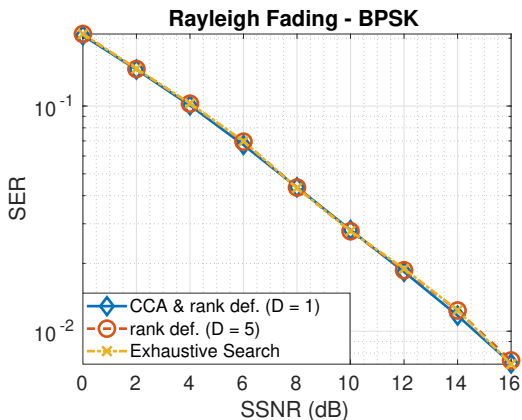


Figure: Secondary user performance under BPSK modulation ($N = 32$). SSINR is fixed to -45 dB. Primary sends QPSK.

Numerical Results - 4QAM

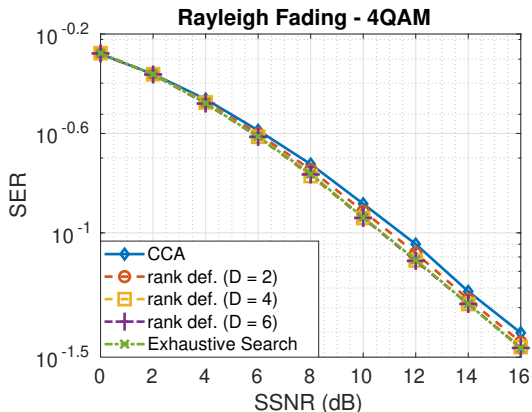


Figure: Secondary user performance under 4QAM modulation ($N = 16$). SSINR is fixed to -45 dB. Primary sends QPSK.

Conclusions

- **Signal Alignment Technique:**

- Simple repetition coding and multiple receiver antennas allows CCA decoding and enables seamless coexistence of users in the same wireless medium.

- **Innovative Approach:**

- Directly incorporating binary constraint into CCA-based signal alignment for BPSK and 4QAM constellations

- **Key Finding:**

- Suboptimal two-step solution approaches optimal performance with lower complexity, making it practical for real-world applications.

Thank You!

Contact: {wxk3qj, nikos}@virginia.edu

This research was partially supported by NSF ECCS-2118002 and
AST-2132700.

